


> Linea FLOOR-TYPE

*

				RAM-BORING				
Max. Vertical with AUA	Max. Vertikal mit AUA	Max. Verticale con AUA	mm	HB 130MM	HB 150MM	HB 160MM	HB 180MM	HB 200MM
HEADSTOCK	BOHR SPINDEL	TESTA						HYDROSTATIC SPINDLE BORING
Ø Spindle	Spindeldurchmesser	Ø Mandrino	mm	130 - 150 - 160	150 - 160	160 - 180	160 - 180	200
Spindle Taper	Aufnahme	Attacco Cono	ISO	50 - Big Plus	50 - Big Plus	50 - Big Plus	50 - Big Plus	50 - Big Plus
Max. Rotation Speed	Max. Drehzahlen	Max. Velocità	RPM	4.000	4.000	4.000 - 3.000	4.000 - 3.000	2.500
Gearbox Steps	Getriebestufen	Gamme	NR	2	2	2	2	4
Motor Max Power	Max. Motor -Leistung	Potenza Max. Motore	kW	75	80	80	80	100
Motor Max Torque	Max. Drehmoment Spindelmotor	Coppia Max. Motore Mandrino	Nm	3.250	4.000	4.000	4.000	12.500
RAM Section	Sektion des RAM	Sezione RAM	mm	560 x 515	560 x 515	560 x 515	560 x 515	560 x 515
TRAVELS	VERFAHRWEGE	CORSE						
Spindle - W	Spindel - W	Mandrino - W	mm	1.000	1.100	1.100	1.100	1.100
Long. Ram - Z	Längsweg des Ram - Z	Long. Ram - Z	mm	1.000	1.300	1.600	1.600	1.600
Total Travel - Z + W	Gesamtweg - Z + W	Corsa Totale - Z + W	mm	2.000	2.400	2.700	2.700	2.700
Cross Column - X	Querwegtisches - X	Trasversale Tavola - X	mm	4.000+N°x1.000	4.000+N°x1.000	4.000+N°x1.000	4.000+N°x1.000	4.000+N°x1.000
Vertical Head - Y	Vertikalweg - Y	Verticale Testa - Y	mm	2.000 ÷ 3.000	2.700 ÷ 3.700	3.000 ÷ 5.000	4.000 ÷ 7.000	3.000 ÷ 5.000
Rapids	Eilgang	Rapidi	mm/1'	25.000	25.000	20.000	15.000	20.000

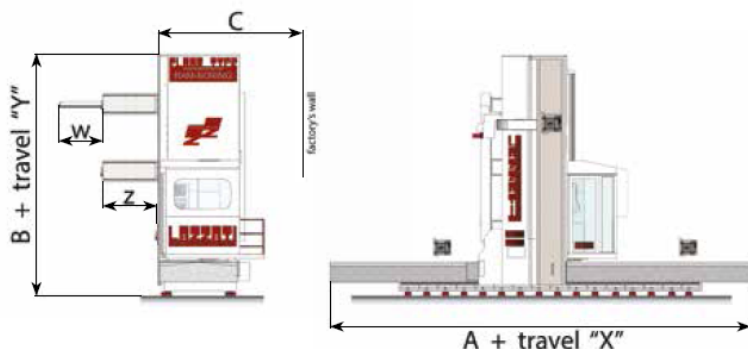

* > Approx Overall dimensions (mm.)

MODEL	HB 130MM	HB 150MM	HB 160MM	HB 180MM	HB 200MM
A	6.000	6.000	6.000	6.000	6.000
B	3.000	3.300	3.500	3.700	3.700
C	4.200	4.600	5.100	5.100	5.100

* The specifications and information above-mentioned may be changed without prior written notice.

* For more details please contact LAZZATI.