


> Linea T-TYPE

*

HEADSTOCK	BOHR SPINDEL	TESTA								
Ø Spindle	Spindeldurchmesser	Ø Mandrino	mm	130 -150	150	150 - 160 - 180	A UA 360 (360.000)			
Spindle Taper	Aufnahme	Attacco Cono	ISO	50 - Big Plus	50 - Big Plus	50 - Big Plus	50 - Big Plus			
Max. Rotation Speed	Max. Drehzahlen	Max. Velocità	RPM	4.000	4.000	4.000	6.000			
Motor Max Power	Max. Motor -Leistung	Potenza Max. Motore	kW	75	75	80	75			
Motor Max Torque	Max. Drehmoment Spindelmotor	Coppia Max. Motore Mandrino	Nm	1.200 - 3.250	3.250	4.000	1.000			
RAM Section	Sektion des RAM	Sezione RAM	mm	515 x 510	515 x 510	515 x 510	500 x 400			
TRAVELS	VERFAHRWEGE	CORSE								
Long. Ram - V	Längsweg des Ram - V	Long. Ram - V	mm	Fix	Fix	Fix	Fix			
Spindle - W	Spindel - W	Mandrino - W	mm	900	900	1.100 - 1.300	-			
Vertical Head - Y	Vertikalweg - Y	Verticale Testa - Y	mm	2.000 ÷ 3.000	2.000 ÷ 3.500	2.000 ÷ 3.500	2.100 ÷ 3.100			
Long. Column - Z	Längsweg Ständers - Z	Long. Montante - Z	mm	1.500 ÷ 3.000	1.500 ÷ 3.000	1.500 ÷ 3.000	1.500 ÷ 3.000			
ROTARY TABLES	DREHTISCH	TAVOLA GIREVOLE								
Version	Version	Versione		TRT-15	TRT-25	TRT-40	TRT-40	TRT-60	TRT-15	TRT-25
Cross Table - X	Querweg Tisches - X	Trasversale Tavola - X	mm	2.000 ÷ 4.000	2.500 ÷ 5.000	3.000 ÷ 6.000	3.000 ÷ 6.000	3.000 ÷ 7.000	2.000 ÷ 4.000	2.000 ÷ 5.000
Min. Surface - B	Min. Tischfläche - B	Superficie Min. - B	mm	1.600 x 2.000	1.600 x 2.000	1.650 x 2.000	1.650 x 2.000	2.500 x 2.500	1.600 x 2.000	1.600 x 2.000
Max. Surface - B	Max. Tischfläche - B	Superficie Max. - B	mm	1.800 x 2.400	1.800 x 2.400	2.000 x 3.000	2.500 x 3.000	3.000 x 3.500	1.800 x 2.400	1.800 x 2.400
Max Centered Load	Max. Belastung	Carico Max. Centrato	Ton.	15	25	40	40	60	15	25
Rapid Feeds	Eilgang	Rapidi	mm/1'	18.000	15.000	15.000	15.000	12.000	18.000	15.000

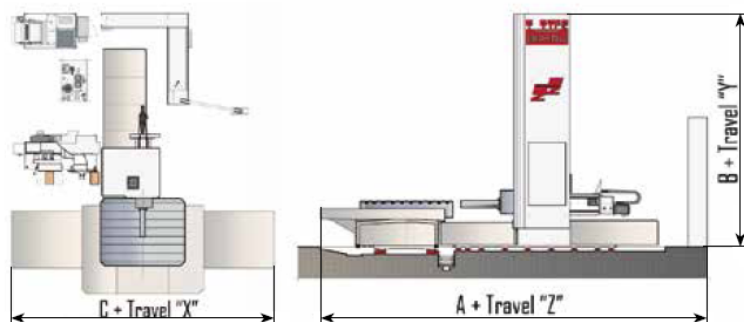

* The specifications and information above-mentioned may be changed without prior written notice.

* For more details please contact LAZZATI.

* > Approx Overall dimensions (mm.)

MODEL	HB 130T		HB 150T	HB 160T		HB 2TF	
TRT	TRT-15	TRT-25	TRT-40	TRT-40	TRT-60	TRT-15	TRT-25
A	5.500	5.550	6.100	6.400	7.100	4.500	4.550
B	2.850	2.850	2.850	2.850	2.850	2.850	2.850
C	3.270	3.650	3.800	3.800	4.600	3.270	3.650